

Introduction

Decotouch Group of Companies is pioneer in the manufacturing and marketing of building material in India and abroad. For more than a decades, the group has been manufacturing and marketing Wall Putty, Gypsum Plaster, Water Proofing products, Water-based and Alkyd-based Decorative Paints, etc. under the brand names **DECOTOUCH**. These products have the similar popularity in the market and commands a good amount of confidence from the customers. Our valued customers who have been using our products since long are our brand ambassadors and have been standing by with the above brands.

Now, we introduce and add one more quality product, that is, gypsum board, to our range of products. This is normally used in partitions and false ceiling, among other uses.



Raw Material

“Our products are manufactured from Natural Gypsum”

The gypsum being used for manufacturing the gypsum board is high quality product of OMAN / IRAN origin which one of the choicest locations in the world, naturally. The quality is maintained batch after batch and tested across range of tests. Once through with these stringent quality tests, only then the final product is out to the market.

The other raw material used for making the gypsum board is also sourced from the one of the best quality paper producing companies.



Range of Products

The gypsum board is being introduced based on the market standard and requirements. The following variety and range of products is available :



Decotouch Gypsum Board - Standard

This is the most commonly used gypsum board for partitions and false ceilings. Widely available in range of thickness as well as in sizes.



Decotouch Gypsum Board - MR Grade

This is a Moisture Resistant (MR) gypsum board and may help in absorbing up to 5% of moisture in the environment or ambience in 24 hours with direct exposure. However, once exposed to moisture, the capacity of absorption would decrease with the passing of time.



Decotouch Gypsum Board - FR - Grade

This is a Fire Resistance (FR) gypsum board which can provide fire rating up to 4 hours. Also, this FR grade gypsum board is quite useful in high traffic and fire-trone areas like airport, hospitals, shopping malls, educational institutions, etc.

Heavy Duty, Maximum Beauty

Technical Specifications

Type	Standard	Moisture Resistance	Fire Resistance
Thickness	8/10/12.5 mm	12.5 mm	12.5 mm
Colour	Face : Ivory Back : Dark Brown	Face : Green Back : Dark Brown	Face : Pink Back : Dark Brown
Edge	Tapered, the standard convenient type *Squared		
Size	1220 x 1830mm	1220 x 1830mm	1220 x 1830mm


Method of Application

There are normally two methods of installing a false ceiling.

One is by using gypsum powder along with wire mesh. This is cumbersome process and may result in poor finishing in the end. This type of false ceiling is heavy weight and may lead to cracks. Also, this one is not conducive to frequent maintenance and alterations.

In order to have a false ceiling which is light in weight, easy to maintain and open to alterations, the other option is - using **gypsum board**. The lead time to install this type of system is quite minimum using grid-hanger system, as shown in the above picture.

Depending upon the dimensions of the site-area, the normal distance between two hangers is around 1.0 to 1.5 mtrs and to this, a grid of GI-mains and GI-channels is fixed by way of self-threading steel screws. L-shaped strip is fixed at the perimeter of the site area where false ceiling is to be done. The gypsum board is fixed at the bottom-end of the grid using the steel screws. Cut-outs are made wherever required in the gypsum board. All joints are sealed by jointing compound and a paper masking tape is used to cover the joints in order to give the ceiling or partition a smooth look. Now, depending upon the utility, a normal top coat of water based paint can be applied on the surface. The ceiling or the partition is ready. Broadly, at a typical and standard site, 40-60 square meter of area can be done in a day.

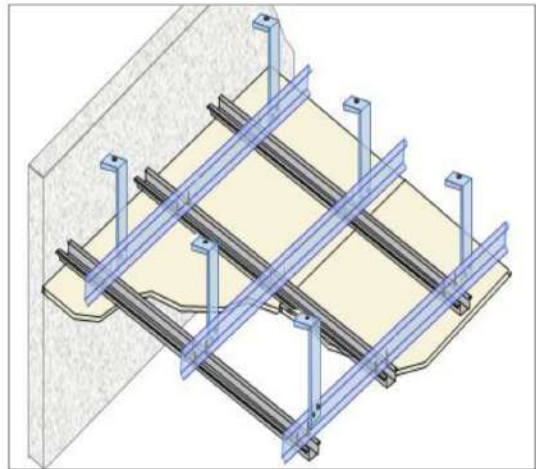

For Sales Enquiry, Please Contact

DECOTOUCH PAINTS LTD.

Head Office : 3399, Second Floor, Mahendra Park Chawk,,
Rani Bagh, Pitampura, Delhi – 110034. India
Mob. : 730 2255 187

Email : sales@decotouchpaints.com, sales.decotouchpaints@gmail.com
website – www.decotouchpaints.com

Note : All or any information or specification may change without notice. Please check the exact information with the company or company's authorised representative regarding the latest information of specifications. Image are meant for mere depiction and does not constitute an obligation on the company of any sort what so ever.

Heavy Duty, Maximum Beauty